

SIENA SR INTEGRATED DOWNLIGHT

PART OF THE MEGAMAN FIXTURES RANGE

MEGAMAN®



SIENA SR

Instant start integrated LED
Specular Reflector Downlight.



FEATURES

- Recessed integrated LED Downlight
- Available in 10.5W, 16.5W and 25.5W IP44 and 13W IP20
- Polycarbonate housing with polished aluminium specular reflector
- Low glare
- U-DIM™ and Dim to Warm variants
- Plug-in connectors
- Light weight
- L90 at 25,000 hours, 50,000 hours rated life
- Up to 105 lumens per watt

BENEFITS

- Ideal replacement for conventional plug-in tube downlights
- Large range of sizes allows retrofit for many traditional downlights in existing ceiling cut-outs
- Specular reflector maximises light throw to the desired point of illumination
- Low glare aluminium reflector offers visual comfort
- U-DIM™ technology offers an enhanced dimming range from 100% down to 5%
- Dim to warm technology – emitting a warmer light when dimmed from 2800K to 1800K, simulating the characteristics of halogen
- No external driver required for quick and easy installation
- Part L compliant

APPLICATIONS

- Offices
- Shopping centres
- Reception areas
- Schools
- General purpose applications







SPECIFICATION




SIENA SR INTEGRATED LED DOWNLIGHT

UK Order Code >	519276	519278	519280	519282	519284	519286	191301
Watts	10.5W	10.5W	16.5W	16.5W	25.5W	25.5W	13W
Colour Temp (K) /CRI	2800 / 80	4000 / 80	2800 / 80	4000 / 80	2800 / 80	4000 / 80	2800-1800 / 80
Lumens (lm)	950	950	1560	1560	2700	2700	900
Candelas (cd)	500	500	850	850	1900	1900	670
Dimmable	Y	Y	Y	Y	N	N	Y
Hrs Lamp Life (L70)	50,000	50,000	50,000	50,000	50,000	50,000	50,000
Hrs Lamp Life (L90)	25,000	25,000	25,000	25,000	25,000	25,000	25,000
Beam Angle	90°	90°	90°	90°	90°	90°	60°
Weight (g)	253	253	337	337	525	525	172
Dimensions (H x D mm)	84x145	84x145	94x172	94x172	100x225	100x225	78x110
Colour/Finish	White	White	White	White	White	White	White
Shape	Round	Round	Round	Round	Round	Round	Round
Hole Cut-Out (mm)	125	125	150	150	200	200	85
Min Ceiling Depth (mm)	85	85	95	95	98	98	84

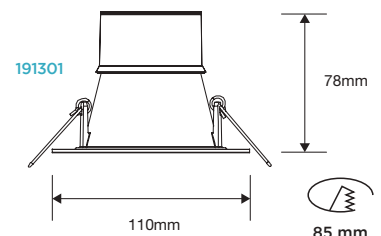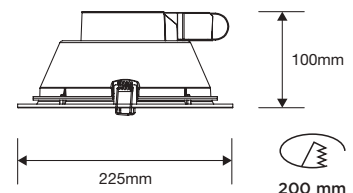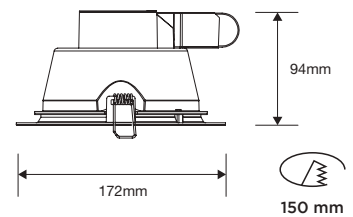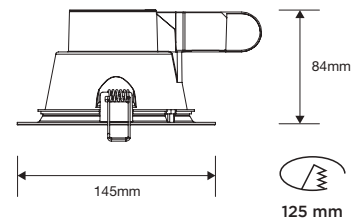

Terminal box facilitates easy installation, maintenance and through wire looping.



* Maximum output from highest spec lamp/module in range.
 * Lamps are tested to both L70 and L90 standards. Figure represents L70.