


Megaman®'s new LED batten Farron, is direct replacement of T5 and T8 fluorescent tubes with variable and selectable wattages and lumen outputs. Built in Opal diffuser and Microwave Motion Sensor.

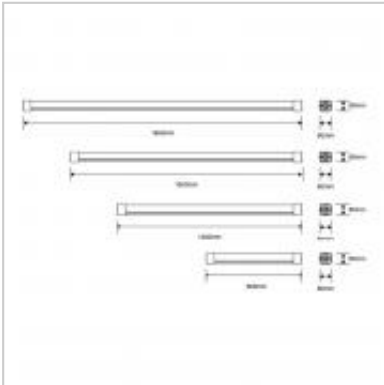

## 26/52W Farron Integrated 4000K LED Batten

<b>Product Code</b>	<b>180364</b>
<b>International Model Number</b>	<b>FIB73700v0-DS</b>
<b>Description</b>	<b>26/52W Farron Integrated 4000K LED Batten</b>
<b>Watts</b>	<b>26/52W</b>
<b>Colour temperature/CRI</b>	<b>4000K / 80</b>
<b>Lumens</b>	<b>2600/5200lm</b>
<b>Candelas</b>	<b>900cd</b>
<b>Dimmable</b>	<b>N</b>
<b>Beam angle</b>	<b>120</b>
<b>Lamp life (max)</b>	<b>50,000hr</b>
<b>Weight</b>	<b>1571g</b>
<b>Dimensions</b>	<b>1500x80x65</b>
<b>IP rating</b>	<b>IP20</b>

Last modified: 2019-11-12 14:25:35.

View online at <https://www.megamanuk.com/products/fixtures/led-batten/farron/180364/>

**Megaman (UK) Limited**, Megaman House, 2 Quadrant Park, Mundells, Welwyn Garden City, Herts, AL7 1FS  
**Telephone:** +44 (0) 1707 386000 , **Email:** [sales@megamanuk.com](mailto:sales@megamanuk.com) **Website:** [www.megamanuk.com](http://www.megamanuk.com)

