



An exceptional LED lay-in fitting for use in high footfall applications where access is limited and maintenance difficult. Non dimming driver included.

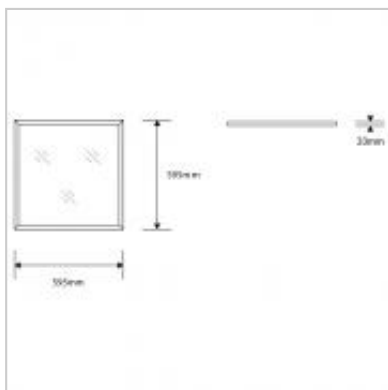

## BERTO BACKLIT TPa LED Panels 36W 6500K Non-Dim Driver

<b>UK Order Code</b>	<b>710675</b>
<b>International Code</b>	<b>FPL71800v0-ex/ta</b>
<b>Description</b>	<b>BERTO BACKLIT TPa LED Panels 36W 6500K Non-Dim Driver</b>
<b>Watts</b>	<b>36W</b>
<b>Colour Temp (K)</b>	<b>6500K</b>
<b>CRI</b>	<b>80</b>
<b>Lumens (lm)</b>	<b>3600</b>
<b>Dimmable</b>	<b>No</b>
<b>Beam Angle</b>	<b>110°</b>
<b>Hrs Lamp Life (max)</b>	<b>50,000</b>
<b>Dimensions (L x W x H mm)</b>	<b>505x505x23</b>

View online at <https://www.megamanuk.com/products/fixtures/commercial/berto/berto-backlit/710676/>

**Megaman (UK) Limited**, Megaman House, 2 Quadrant Park, Mundells, Welwyn Garden City, Herts, AL7 1FS  
**Telephone:** +44 (0) 1707 386000 , **Email:** [sales@megamanuk.com](mailto:sales@megamanuk.com) **Website:** [www.megamanuk.com](http://www.megamanuk.com)

